

S360-444B GENELEC Wall Mount for GENELEC S360, 8260, 8x5x



Instruction manual

1. Scope of delivery

WALL MOUNT BRACKET

ADAPTOR PLATE
for:
GENELEC 8260A
GENELEC 8x5x

(enables
horizontal
and
vertical
position
of the 8351)

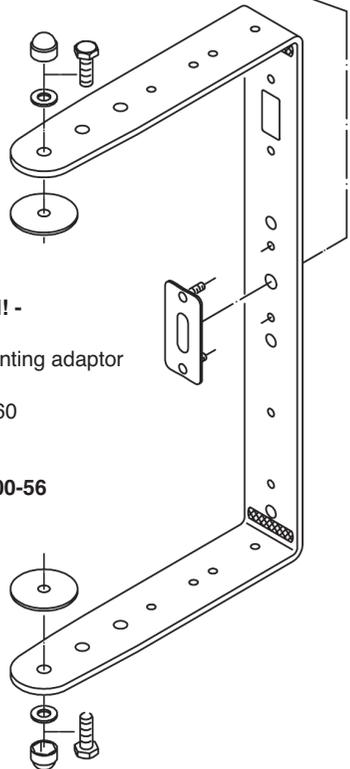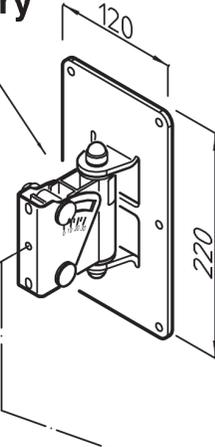

- Not included! -

U-bracket mounting adaptor
for
GENELEC S360
S360-424B

K&M 24468-000-56

2. Required arrangements


2.a

Check if all the componets are there and o.k.

2.1 - Screws, safety nuts and washers (in a PE-bag)


2.2 - Adaptor plate (in air cushion)

2.3 - Wall mount bracket

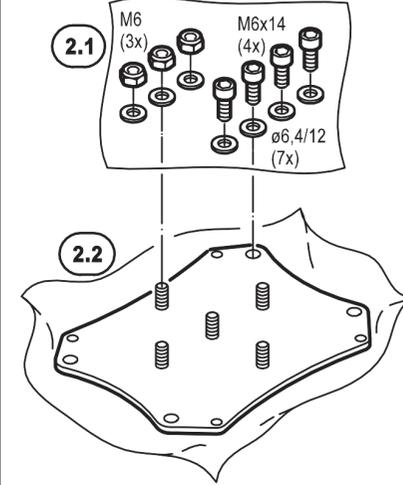


2.c

Gather U-bracket from wall bracket

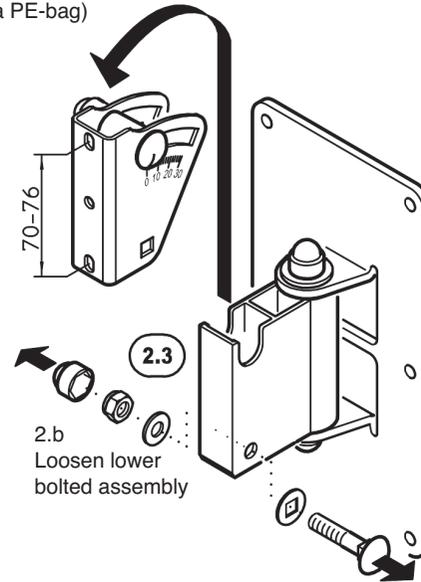

3. Wall bracket fastening

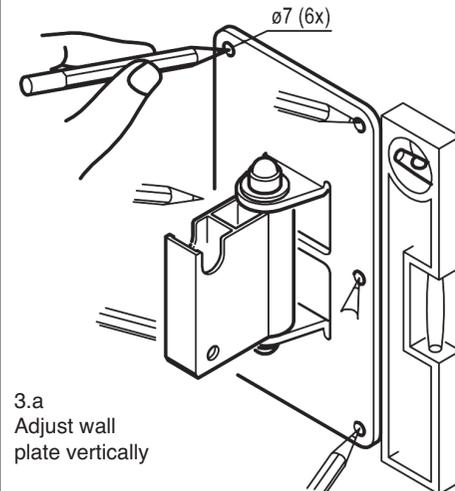

3.a


Adjust wall
plate vertically

3.b

Anchor holes drilling (6x
diameter

-6 mm steel-anchor-bolt


-8 mm universal frame fixing set

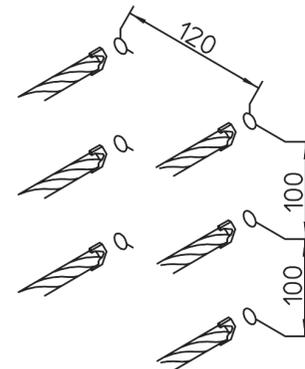

4. Wall mount options


A concrete wall - e.g.: steel-anchor-bolt M 6 x 65 mm

- drill and blow out hole, place anchor, wall bracket and washer, tighten hexnut

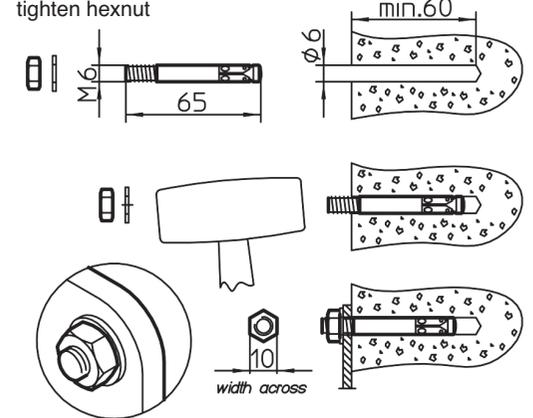

B perforated bricks - e.g.: unisversal frame fixing set
8 x 80 mm

- drill, countersink and blow out hole, place anchor and bracket,
fix hexagon head wood screw

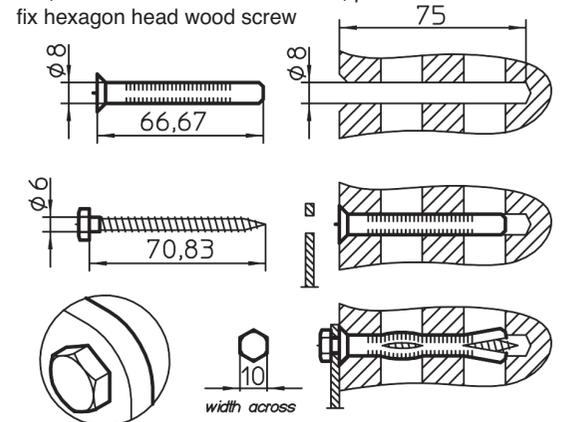

C injection-molded-anchor

- without sieve bushing for concrete wall

- with sieve bushing for perforated bricks /

optional with threaded bolt M6 or threaded bushing M6

Advantages: fixing without pressure, enables repeated mounting,
capable for diverse wall materials
(please notice instructions of anchor manufacturers).


S360-444B GENELEC Wall Mount for GENELEC S360, 8260, 8x5x

Instruction manual

5.a
Bolt the U-bracket to the adaptor plate. Use three safety nuts M6 with washers.

Tightening torques
10 Nm


For horizontally mounting of the GENELEC 8351 turn the adaptor plate

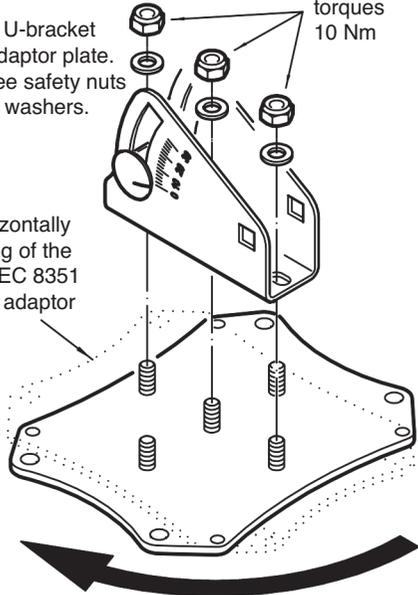


5. Installation

5.b
Bolt the monitor to adaptor plate. Use four screws M6 x 14 mm with washers


e.g. Genelec 8260A

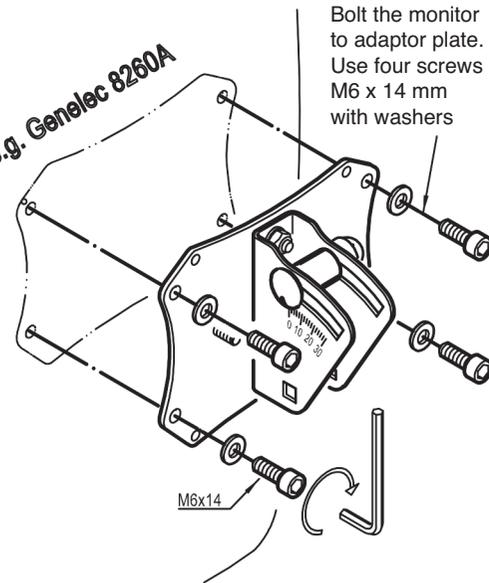

5.c
Replace swivel joint (with mounted monitor) into wall bracket

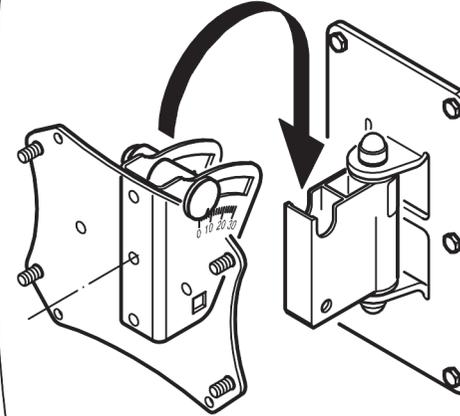

5.d
Secure swivel joint to the wall bracket by tightening lower bolted assembly

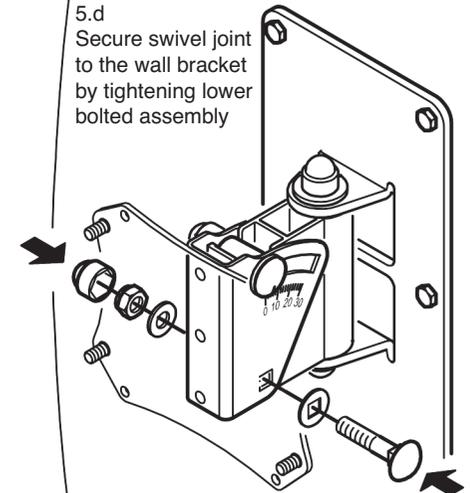


6. Settings

6.a
Continuously adjustable up to 30°, by fixing the upper bolted assembly

Tightening torques
11 Nm

Tightening torques
9 Nm

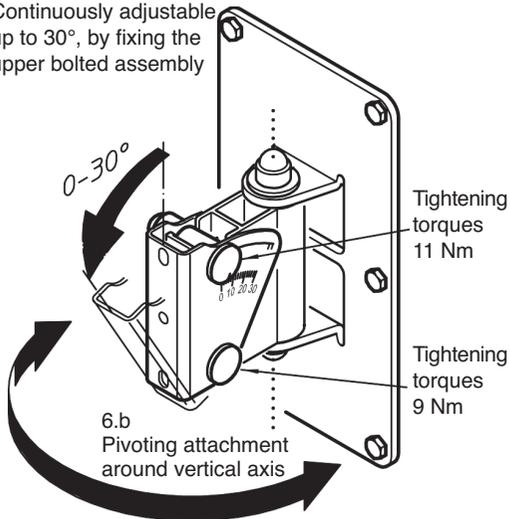


6.b
Pivoting attachment around vertical axis

7. Dimensions

7.a
hole pattern:
127 x 70 mm - M6
&
VESA 100 x 100 - M4/5

7.b
Weight: 1.8 kg

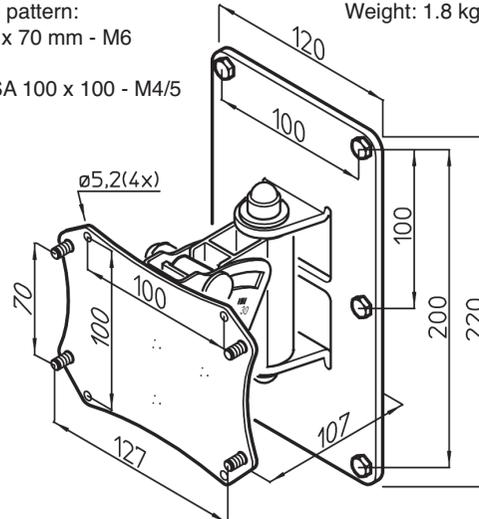

Safety instructions

- For GENELEC 8260A, 8351A, 8250A, 8050A (with included adaptor plate)
- For GENELEC S360 (S360-424B U-bracket mounting adapter needed!)
- Check for damage prior to and after use. Damaged mounts may not be used again.
- Not suitable for outdoors or moist rooms.
- Observe the local mounting regulations (they may deviate from the examples presented here).
- Only mount on suitable walls with the corresponding assembly material (not included in the delivery). Examples - see Point 4.A/B/C. Observe the placement instructions provided by the anchor manufacturer.
- Not suitable for fragile walls. Beware of power supply lines and water conduits. In case ask an expert.
- Only use trained technicians to assemble the system.
- Ensure that the screws are tight and load-bearing, in particular as regards the setting of the loudspeaker angle.
- Inspect bolted assemblies periodically
- The placement of the loudspeakers requires two physically fit qualified technicians.
- Careful and attentive handling is required when adjusting the stand - due to the possibility of pinching or wedging your hand.
- External influences such as bumping into the loudspeakers, brushing into the loudspeakers, things thrown at the loudspeaker, wind etc. represent a risk and must be avoided. Measures: Compliance with safety distances, keeping unauthorized persons at a distance, if needed put safety cordons.
- The instructions provide directions to all of the important setup and handling steps. We recommend you keep these instructions for future reference.